




COMANSA

LINDEN 500

5 LC 4010


4t

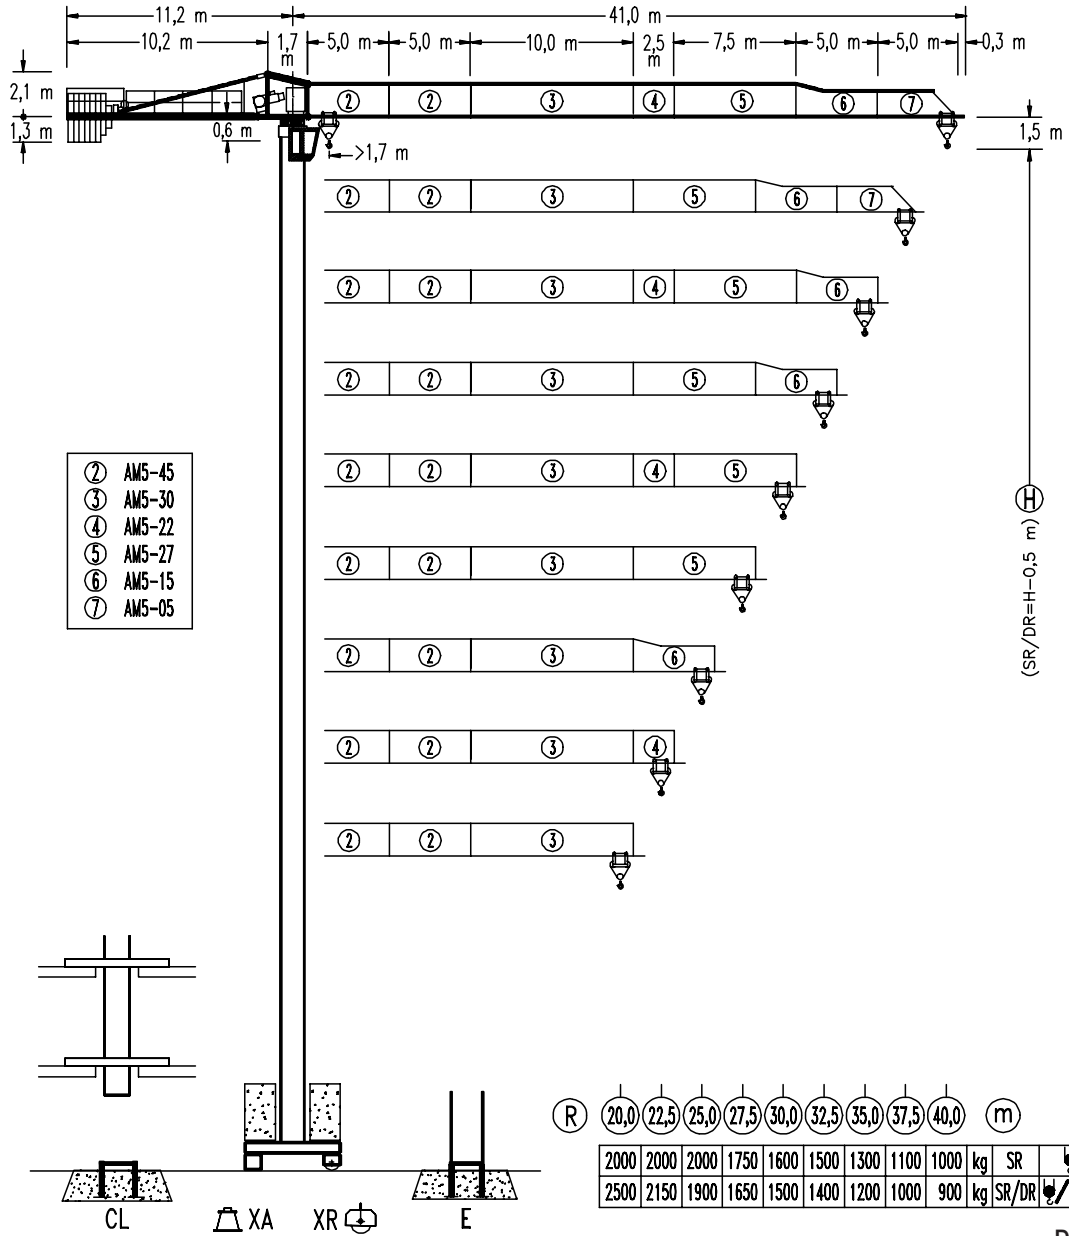

DIN 15018 H1 B3



(R)	R(Cmax)	Cmax	20,0	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	m
40,0	SR	22,3 m	2000	1980	1750	1570	1420	1290	1180	1080	1000	kg
	SR/DR	12,0 m	4000	2200	1910	1680	1490	1330	1200	1080	990	
37,5	SR	22,6 m	2000	2000	1780	1590	1440	1310	1200	1100	kg	
	SR/DR	12,1 m	4000	2230	1930	1700	1510	1350	1210	1100		1000
35,0	SR	24,2 m	2000	2000	2000	1930	1730	1560	1420	1300	kg	
	SR/DR	12,9 m	4000	2410	2090	1840	1640	1470	1320	1200		
32,5	SR	25,3 m	2000	2000	2000	1820	1650	1500	kg			
	SR/DR	13,5 m	4000	2540	2210	1940	1730	1550			1400	
30,0	SR	24,7 m	2000	2000	2000	1970	1770	1600	kg			
	SR/DR	13,2 m	4000	2460	2140	1880	1670	1500				
27,5	SR	24,5 m	2000	2000	1950	1750	kg					
	SR/DR	13,0 m	4000	2430	2110	1860			1650			
25,0	SR	25,0 m	2000	2000	2000	kg						
	SR/DR	13,3 m	4000	2480	2160			1900				
22,5	SR	22,5 m	2000	2000	2000	kg						
	SR/DR	13,2 m	4000	2470	2150							
20,0	SR	20,0 m	2000	2000	2500	kg						
	SR/DR	13,3 m	4000	2500								

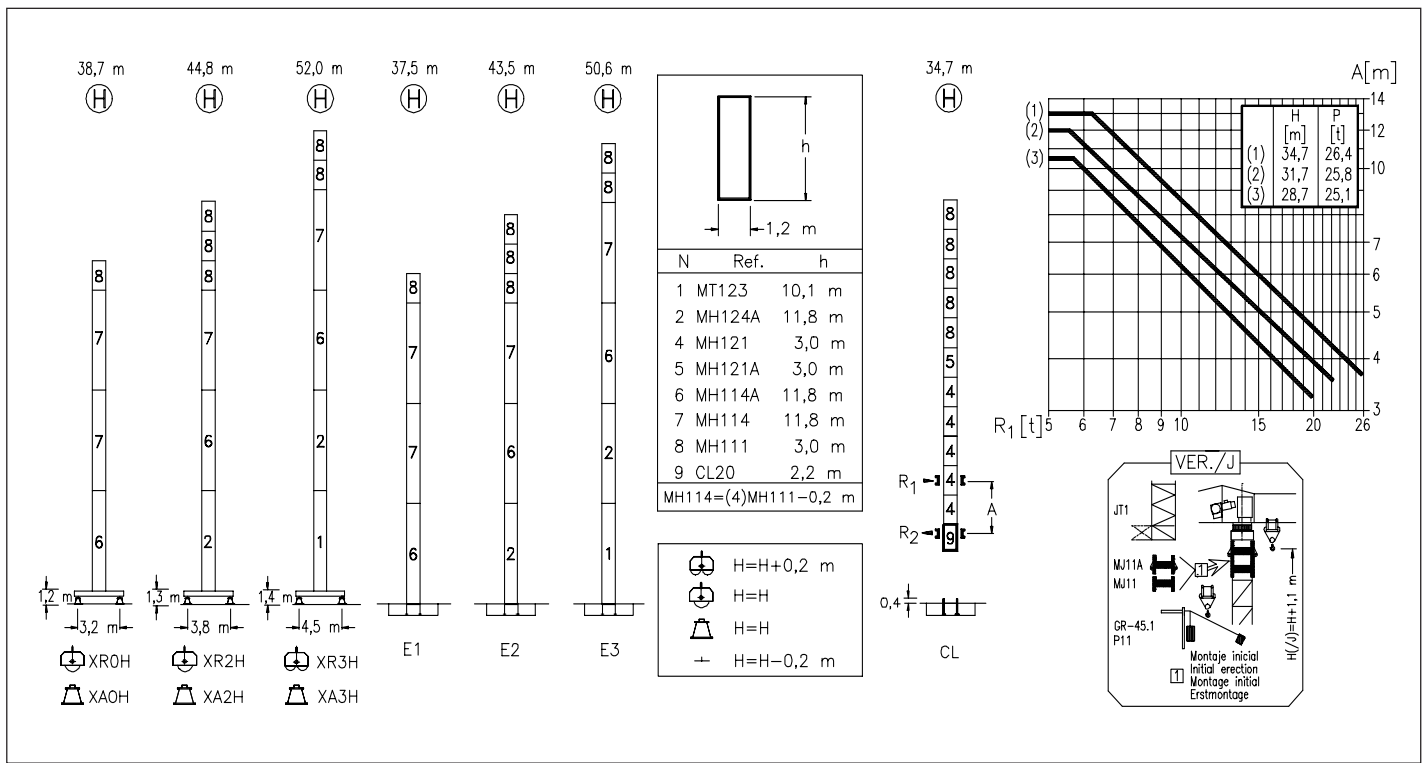

CS2-1.9

1,9 kW

16 m/min
48 m/min

CFU-2.2

2,2 kW

0 ϕ 80 m/min

GR-6.5

65 Nm

0 ϕ 0,8 rpm

TS2-3.0	TS2-4.5	TS2-5.5
2x30 Nm	2x45 Nm	2x55 Nm
0 ϕ 20 m/min		
XR0H	XR2H	XR3H

ES3-13-10

13,2 kW

		I	II	III
SR	m/min	7,5	30	60
	kg	2000	2000	1200
DR	m/min	3,7	15	30
	kg	4000	4000	2400

EFU2-11-10

11 kW

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	---

Opcional Optional En option Kaufoption	
---	--

R. máx.	En servicio In operation En service In Betrieb	XR0H 40,4 t
		XR2H 41,7 t
		XR3H 44,8 t

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	XR0H 57,9 t
		XR2H 65,5 t
		XR3H 74,1 t



Construcciones Metálicas COMANSA S. A.
 Polígono Industrial de Areta
 E-31620 Huarte-Pamplona.- SPAIN
 Tel.: (34) 948 335 020 - Fax: (34) 948 330 810
 e-mail: info@comansa.com