



Combination Service Unit & Heavy Duty Crane

62' Work Reach 54' Hook Reach

SQUARE TUBE BOOM

P.T.O., ALL HYDRAULIC, REMOTE CONTROL

1 OR 2 MAN BASKET, SELF LEVELING W/CYL. LOCK

STOP-START-THROTTLE AND DUAL EMERGENCY VALVES FASTEST LOAD LINE RIG-UP IN THE INDUSTRY & SELF STORING FULL POWER RETRACTION AT ANY ANGLE

FEATURES:

Design and mechanical characteristics especially combined for the sign servicing industry. Wilkie Mfg. L.L.C. utilizes stock commercial components in the fabrication of its products, ensuring you of readily available parts. The rugged features, reliable operation and simple maintenance make Wilkie Cranes profitable for their owners. We offer a full set of optional equipment to complete your package, so it is immediately ready to put to work upon arrival at your plant.

Full Remote control at workman's basket of elevation, extension, rotation engine throttle and engine start/stop

All 3 functions will operate at same time and at full speed

Full power retraction at any angle

All hydraulic powered for smooth, precise, control

All square tube boom for increased rigid support

1 Man work basket-standard-steel frame, hydraulic cylinders, self-leveling (2 man option)

Quick connect load line to convert from personnel lift to material lifting

360° non-continuous rotation *Option for continuous rotate

3 Section aluminum ladders attached to boom *Option

Wide spread Hydraulic outriggers or Manual or Manual/Hydraulic split * 3 options

Optional welding leads from base to basket

Optional 110V remote cord from base to basket

Ball bearing slewing ring turntable

Rotation drive, totally enclosed with adjustment collar for exacting mesh to bull gear

Rotation motor direct coupled to Gear Box

All functions pressure relieved for balanced system

Single stage cylinder elevation, double acting power down, pressure relieved

Single stage cylinder main extension, double acting power retracting

MINIMUM TRUCK SPECIFICATIONS:

9,000lb. Front axle, 17,000 Rear axle


25,950 G.V.W.: 120" C.A.: 189" W.B.

Outriggers Stabilizers required

Reinforced truck frame

NON INSULATED

STATE & FEDERAL REGULATIONS REQUIRE CERTAIN CLEARANCES OF ELECTRICAL POWER LINES.

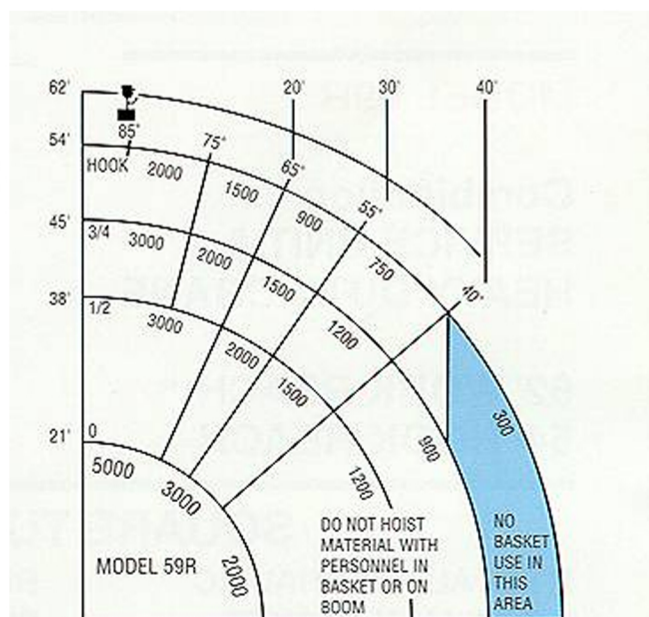

DO NOT OPERATE IN SHADED AREA WITH PERSONNEL IN BASKET OR ON BOOM.

Do not hoist material with personnel in basket.

Basket Capacities
1 Man 350 lbs.
2 Man 600 lbs.