



HT66KX

FEATURES

- * 11,000 lb. Maximum Lifting Capacity
- * 66,000 ft.-lb. Moment Rating
- * Fully Hydraulic Power
- * Hexagonal Boom Construction
- * Fully Hydraulic Boom Extension 12-25 ft.
- * High Speed Winch: 66 ft./min.
- * 400° Power Rotation
- * Meets ANSI B30.5 Safety Standards
- * Meets OSHA 1910.180 Requirements

STANDARD EQUIPMENT

- * Capacity Overload Shut-Off System
- * Anti-Two-Blocking System
- * 100 ft. of 7/16" Aircraft-Quality Wire Rope
- * Remote Control Pendant: 25 ft. Cord and Quick Disconnect
- * Snatch Block with Swivel Hook Safety Latch

MINIMUM REQUIREMENTS

- * 33,000 lb. GVWR Chassis
- * Outriggers: Front and Rear
- * PTO, Pump and Reservoir
- * Hydraulic Requirements: 12 GPM, 25 gal. reservoir

LIFTING CAPACITIES	
REACH (FT.)	CAPACITY (LBS.)
6	11,000
12	5,500
18.5	3,550
24.8	2,650

OPTIONAL EQUIPMENT

- * Radio Remote Controls
- * Hydraulic and Manual Outrigger Packages
- * Hydraulic Pumps and Reservoirs
- * Mounting Pedestal for Platform Bodies
- * Boom Rests

Specifications subject to change without notice.




RUGGED. RELIABLE. REAL.

12110 Best Place Cincinnati, OH 45241
 800-226-2238 internetsales@venturo.com
 www.venturo.com

DISTRIBUTED BY:



HT66KX - 12-18.5-25 BOOM MAXIMUM CAPACITY CHART

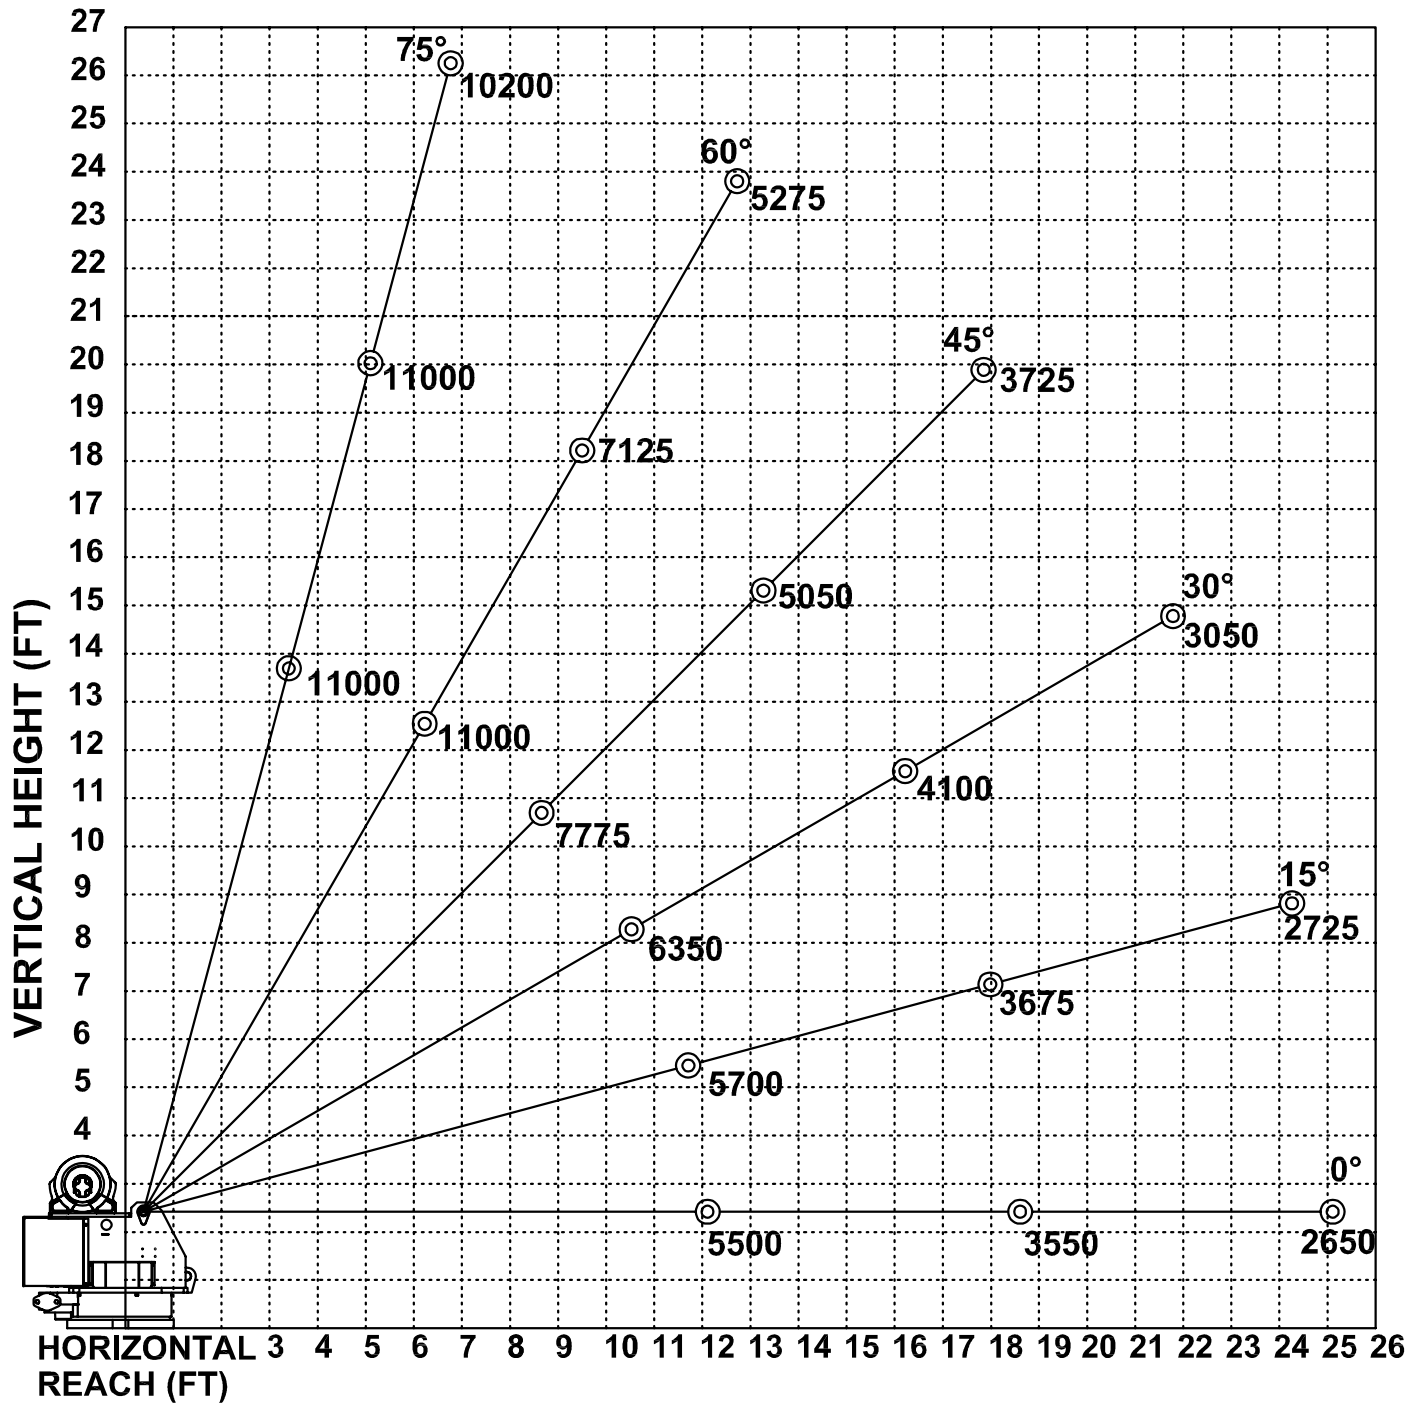

**MUST USE SNATCH BLOCK
FOR LOADS OF 5500 LBS.
AND GREATER**