

6006EH


Specifications

Weight	1,670 lbs (757 kgs)
Length	13' 1" (3.98 m)
Width	1' 9.75" (.55 m)
Height	2' 11.88" (.90 m)
Base Plate Dimensions	16.75" x 16.75" (.43 m x .43 m)
Boom Down	TBD
Boom Retract	TBD
Full 360° Boom Rotation	66-78 seconds

*Truck must be equipped with appropriate outriggers, minimum 75-amp alternator, minimum 100-minute reserve capacity H.D. maintenance-type battery with 500 cold cranking amp capacity.

Lifting Capacities

Reach	Manual/Power Boom Extension
3' (.9 m)	6,000 lbs (2,722 kgs)
4' (1.22 m)	6,000 lbs (2,722 kgs)
5' (1.5 m)	6,000 lbs (2,722 kgs)
6' (1.8 m)	6,000 lbs (2,722 kgs)
7' (2.1 m)	5,140 lbs (2,332 kgs)
8' (2.4 m)	4,500 lbs (2,041 kgs)
9' (2.7 m)	4,000 lbs (1,814 kgs)
10' (3.0 m)	3,600 lbs (1,633 kgs)
11' (3.3 m)	3,270 lbs (1,483 kgs)
12' (3.7 m)	3,000 lbs (1,361 kgs)
13' (3.9 m)	2,770 lbs (1,256 kgs)
14' (4.3 m)	2,570 lbs (1,166 kgs)
15' (4.6 m)	2,400 lbs (1,089 kgs)
16' (4.9 m)	2,250 lbs (1,021 kgs)
17' (5.2 m)	2,120 lbs (962 kgs)
18' (5.5 m)	2,000 lbs (907 kgs)
19' (5.8 m)	1,895 lbs (860 kgs)
20' (6.1 m)	1,800 lbs (816 kgs)

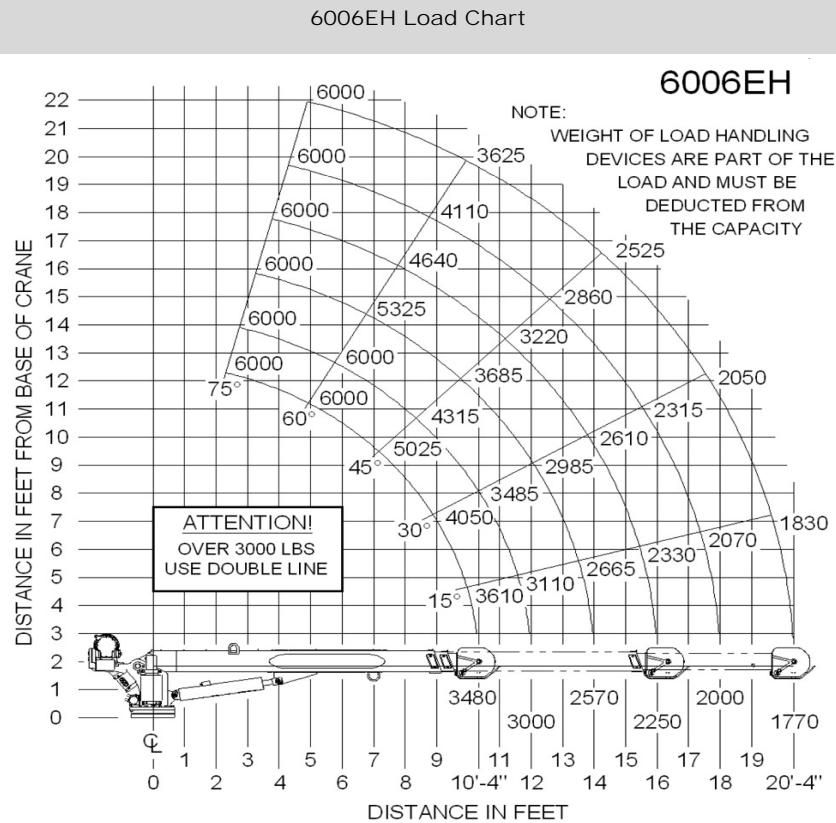

Auto Crane Company / 4707 N. Mingo Rd. Tulsa, OK 74117
918-836-0463 / AutoCrane.com

