

## STANDARD FEATURES

- Altec ISO-Grip® System
- Telescopic/Articulating Aerial Device
- Compensated Articulating Arm
- Hydraulic Boom Extension
- Insulated, ANSI Category C, 46 kV and Below
- Noncontinuous Rotation
- Platform, 24 x 24 x 42 in (610 x 610 x 1067 mm) Nominal
- Hydraulic Platform Leveling
- Platform Capacity – 350 lb (159 kg) Fixed  
350 lb (159 kg) w/ Rotator
- Fully Metered Single Handle Upper Control
- Full Pressure, Open Center Hydraulic System
- Platform Access from the Ground
- Emergency Lowering Valve
- Tool Circuit at Platform
- Back-up Alarm
- Outrigger Boom Interlock System (With Outrigger Option)
- Outrigger Motion Alarm (With Outrigger Option)

## GENERAL SPECIFICATIONS

	AT35-G		AT37-G	
Ground to Bottom of Platform* (at Distance From Centerline)	36.1 ft 11.3 ft	11.0 m 3.4 m	37.8 ft 11.3 ft	11.5 m 3.4 m
Maximum Reach				
End-Mount	28.3 ft	8.6 m	28.3 ft	8.6 m
Side-Mount	26.6 ft	8.1 m	26.6 ft	8.1 m
(@ Platform Height)	12.7 ft	3.9 m	14.4 ft	4.4 m
Stowed Travel Height	10.0 ft	3.0 m	10.0 ft	3.0 m
Boom Articulation				
Lower Boom	-25° to +75°			
Articulation Arm	-7° to +90°			
Rotation	Noncontinuous 370°			
Weight of Unit	2110 lb	957 kg	2160 lb	980 kg

\*Based on 40 inch (1016 mm) Chassis Frame Height

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.



Easy Access From Ground

Altec Sales and Service


## OPTIONS

- Continuous Rotation
- Secondary Stowage System
- Engine Start/Stop
- Tool Circuit at Tailshelf
- Outriggers, Vertical
- Additional Platform Capacity
- Platform Cover
- Platform Rotator - 90° or 180°
- Platform, 24 x 30 x 42 in  
(610 x 762 x 1067 mm)

## RECOMMENDED FEATURES

- Fall Protection System
- Platform Liner
- Wheel Chocks
- With Outrigger Option:  
Outrigger Pads

## REACH DIAGRAM

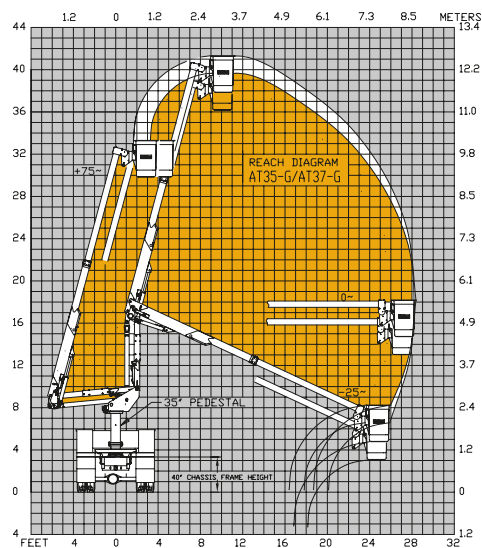

Boom Tip Covers

**Altec Industries, Inc.**

Post Office Box 10264  
Birmingham, Alabama 35202  
Phone 205/991-7733  
Fax 205/408-8051