

Model 94XRB

Hi-Performance Multi-Purpose Lift



- TOTAL HYDRAULIC**
- JOYSTICK BASKET CONTROLS**
- PROPORTIONAL BASE CONTROLS**
- 5000# LIFT WINCH**
- 400# JIB WINCH**
- ROTATING BASKET**
- POWER LEVELED BASKET**



Standard Features


- Power Leveling and Rotating 2 man aluminum 24" X 60" basket
- All functions pressure relieved for a balanced system.
- Joystick proportional controls in basket
- Hydraulic powered self-leveling basket
- Remote engine throttle, and engine start and stop from the base and basket
- Hydraulic cylinders for extension (no cables), Dual extension cylinders for main tubes.
- All hydraulic for smooth three function control at the same time
- Rotation motor direct coupled to gearbox
- PTO powered hydraulic pump with electric shift.
- All operations can run at the same time
- Power retract by hydraulic cylinders
- 360 degree working radius
- Heavy Duty lift capacity
- All Hydraulic powered extension and retraction
- Quick connect load line to convert from service to crane lifting
- Rotation drive with adjustment collar for exacting mesh to bull gear
- Dual, single stage elevation cylinder, double acting
- 5000 lb. rated load line

OPTIONS INCLUDE:

- 110 Volt in Basket
- Welding leads in basket
- Auxiliary hydraulic jib winch in the basket 400 lbs. rated
- Air or power washer leads in basket

MINIMUM TRUCK SPECIFICATIONS:

- 14,000 Lb. Front Axle, 34,000 Rear Tandem Axles
- 48,000 G.V.W.:169" CA: 241"WB
- Truck Frame - 2,000,000 RBM
- Front and Rear outrigger stabilizers required

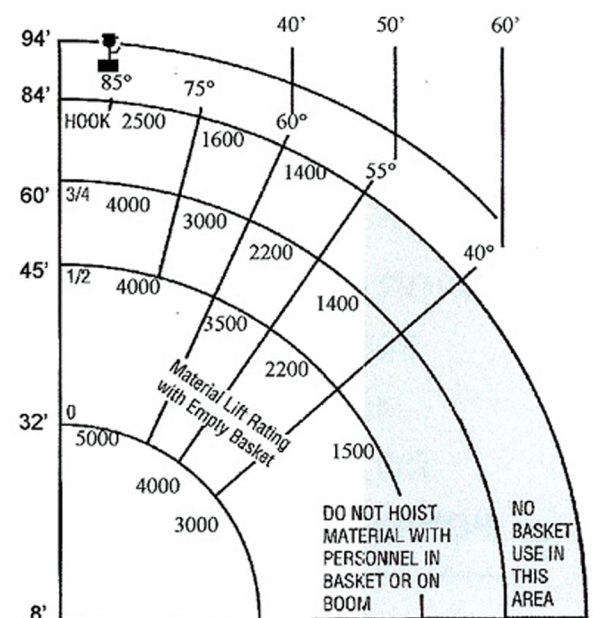

DO NOT OPERATE IN SHADED AREA

Use 2-Part load lines for loads over 3,500 lbs.
Do not hoist material with personnel in basket except with jib winch.

Basket Capacity 600 lbs., 89' floor to ground.

NON INSULATED - ELECTROCUTION HAZARD

STATE & FEDERAL REGULATIONS REQUIRE CERTAIN CLEARANCES OF ELECTRICAL POWER LINES.