PERFORMANCE
INNOVATION
SELECTION

XTREME MANUFACTURING

RELIABILITY
WARRANTY
VISIBILITY

XR842

Capacity	8,000 lbs
Max Lift Height	42'
Forward Reach	28'10"
Frame Leveling L/R	11°
Weight	26,850 lbs
Engine	Perkins 995 hp
Fuel Capacity	48 gal
Tires	Foam Filled 13.00 x 24 E3
GPM	39
PSI	3,500
Hydraulic Oil Cap	58 gal
Length to fork face	20'11"
Width	101"
Height	8'1"
Wheel Base	120"
Ground Clearance	16.5"
Turning Radius	12'
Warranty	Xtreme 10-5-2

XTREME MANUFACTURING
SINCE 2003

10-5-2 WARRANTY

10 YEARS OR **10,000** HOURS
FRAME & CHASSIS WELDMENT

5 YEARS OR **5,000** HOURS
BOOM WELDMENT & ROLLERS

2 YEARS OR **2,000** HOURS
ENGINE, ELECTRICAL, TRANSMISSION, DRIVE AXLES & HYDRAULIC COMPONENTS

1415 W. Bonanza Rd. Las Vegas, NV
(702) 636-2969 (800) 497-1704

WWW.XMFG.COM

XR842 LOAD CHART - STANDARD CARRIAGE

LOAD RATINGS SHOWN ARE FOR VEHICLES EQUIPPED WITH FOAM FILLED TIRES ONLY.

4,000 LBS AT 24 IN MIN CAPACITY FORK (8,000 LBS PAIR).

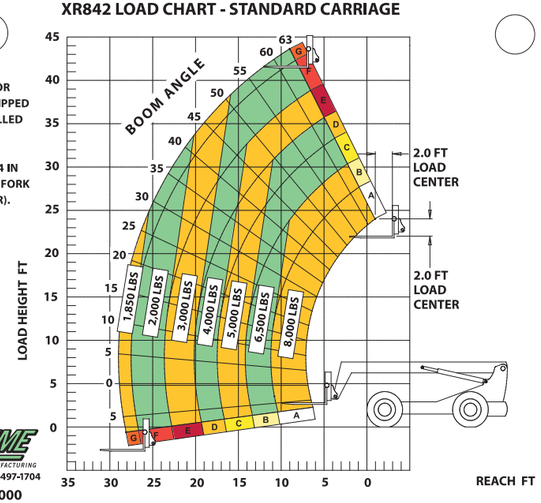

XTREME MANUFACTURING
702-636-2969 • 800-497-1704
P/N 17014-000

PERFORMANCE
INNOVATION
SELECTION

XTREME MANUFACTURING

RELIABILITY
WARRANTY
VISIBILITY

Long-Life Rollers

Boom Lift Point

360° Visibility

Operator Controls

The XTREME Difference

- 360° Visibility
- Long Life Boom Rollers
- Suspension Seat
- Easy Service Access
- Protected Tilt & Extend Cylinders
- Steel Hydraulic & Fuel Tanks
- Long Life Lexan Labels
- Fiberglass Hoods
- Heavy Duty Boom Chains
- Suspended Pedals
- Electrical Ring Terminals
- Wider Outrigger Stance
- Large Capacity Fuel Tanks
- Trunnion Mounted Sway Cylinders
- Melonite Pins
- Rear Axle Stabilization (RAS)
- Center Mounted Power Train
- Standard Auxiliary Hydraulics
- Solid Steel Plate Chassis
- Steel Dash
- Ductile Steel Manifold
- Easy Cab Mounted Grab Handles
- Reliable Perkins Engine
- Master Disconnect Switch
- Boom Lift Point
- Axle Mounted Outriggers
- Manual Lowering Valve (Cylinders)
- Large Cross Section Boom
- Easy Tie Downs
- "Y" Frame Sway Handle
- Heavy Duty Pre-Cleaner
- Additional High Pressure Hyd Filter
- Direct Engine/Trans Connection
- Individual Gauges and Switches

Attachments

- Standard Fixed Carriage (48", 60", 72", 96")
- Fork Positioning Carriage (48", 72", 96")
- Swing Carriage
- Tilt Carriage
- Personnel Platform
- Sling Mount
- Bucket (1.0 - 2.0 cu-yd)
- Truss (2 ft, 3 ft, 12 ft, 15 ft)
- Telescopic Truss (Slide on)
- Pole Grapple Carriage
- Grapple Bucket
- Concrete Hopper

Accessories / Options

- Enclosed Cab w/Heat
- Enclosed Cab w/Heat & A/C
- Boom Work Light Package
- Flashing Amber Strobe
- Pintle Hook
- Tail/Turn/Brake Lights
- LED Lighting
- Steel Fenders
- 5th Wheel Attachment
- Boom Maintenance Stand
- Battery Blanket
- Limited Slip Axle(s)
- Locking Fuel Cap
- Soft Cab
- Additional Lift Points
- Swivel Lifting Hook
- Auxiliary Cab Heater
- Dual Batteries
- Clear Glass
- Padded Arm Rest
- Two Wheel Rear Steer