
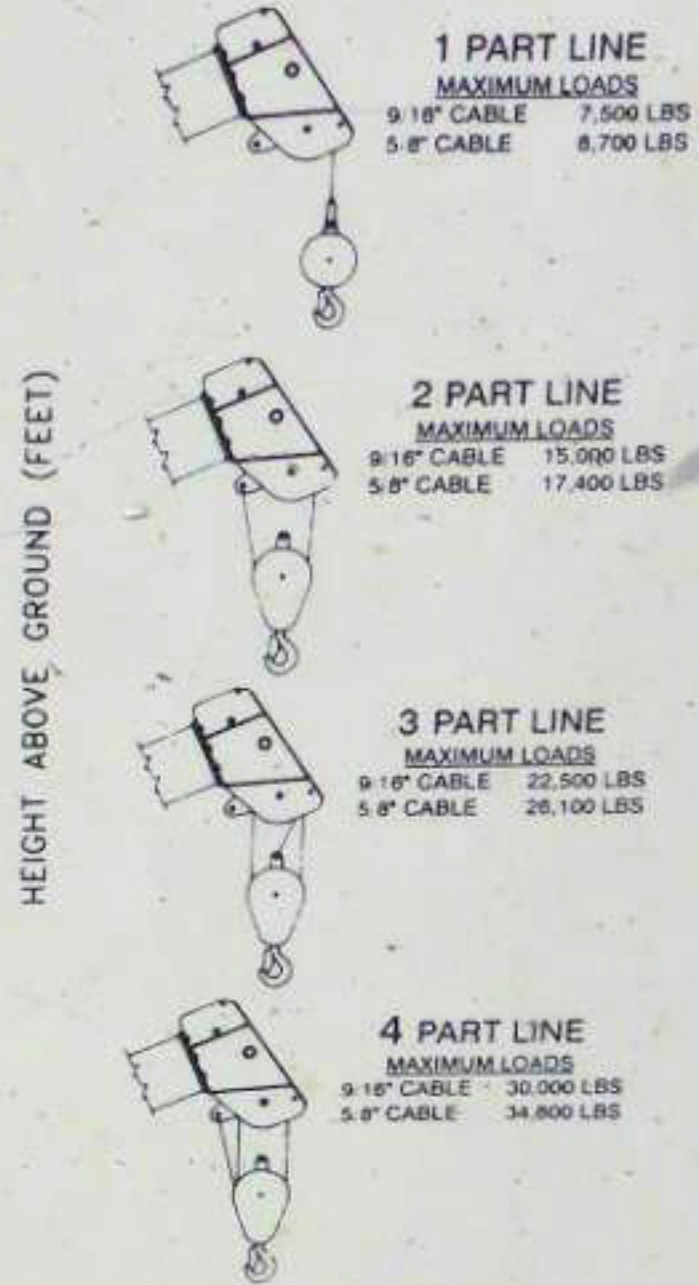


WELDCO HYDRA-LIFT HL15TC70 CAPACITY CHART

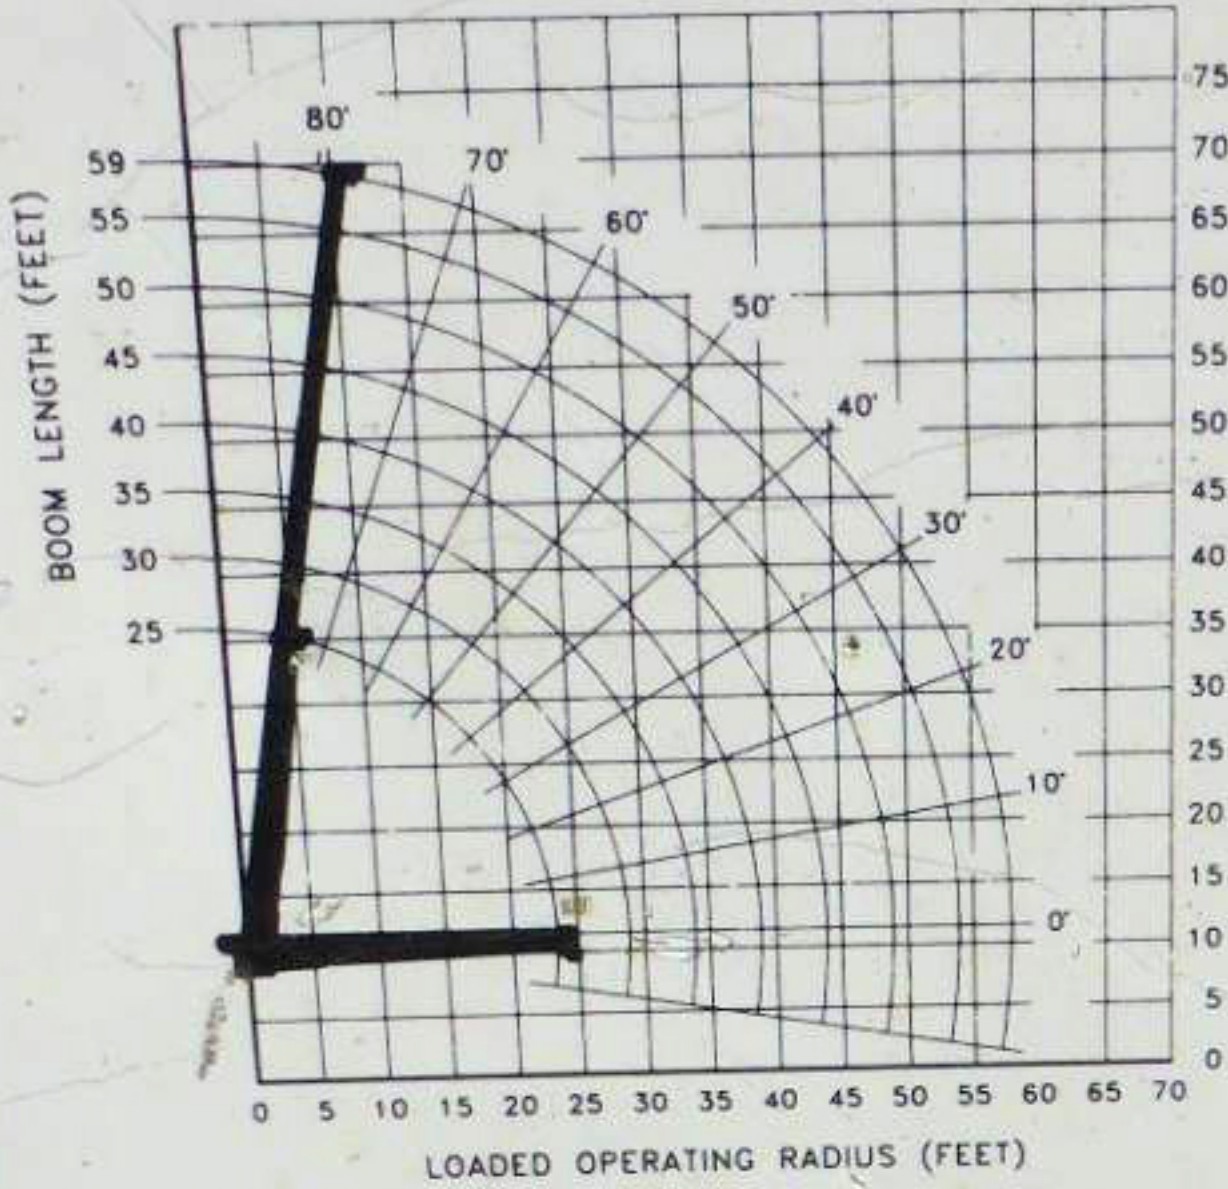

**MAXIMUM RATED LOAD IN LBS.
WITH OUTRIGGERS FULLY EXTENDED**

LOADED OPERATING RADIUS	LOADED BOOM ANGLE	RETRACTED BOOM LENGTH	LOADED BOOM ANGLE	BOOM LENGTH	LOADED BOOM ANGLE	BOOM LENGTH	LOADED BOOM ANGLE	BOOM LENGTH	LOADED BOOM ANGLE	BOOM LENGTH
FEET	△°	25 FT	△°	35 FT	△°	45 FT	△°	55 FT	△°	59 FT
5	80	30,000								
8	73	21,700	78	20,200						
10	68	18,000	75	16,500	78	15,700	80	14,400		
12	62	15,500	71	14,400	76	13,600	78	13,100	79	12,950
14	56	14,000	68	12,500	73	11,750	76	11,250	77	11,100
16	50	12,500	64	11,150	70	10,400	74	9,850	75	9,750
18	43	11,350	60	10,000	67	9,300	72	8,800	73	8,650
20	34	10,300	56	9,200	64	8,450	70	7,950	71	7,800
25			45	7,550	58	7,150	64	6,700	66	6,550
30			32	6,450	50	6,000	58	5,600	60	5,450
35					40	5,150	52	4,800	55	4,650
40					28	4,330	45	4,150	48	4,050
45							38	3,600	41	3,550
50							25	3,100	32	3,100
55									20	2,650
60										

RATINGS ABOVE THE HEAVY LINE ARE BASED ON STRUCTURAL COMPETENCE AND NOT ON MACHINE STABILITY.

IMPORTANT: DEDUCTIONS MUST BE MADE FROM RATED LOADS FOR LIFTING ACCESSORIES; OVERHAUL BALLS, LOAD HOOKS, SNATCH BLOCKS AND LOAD BLOCKS.