



Technical Data

Hydraulic Crawler Crane HS 882 HD Litronic®



Basic Machine

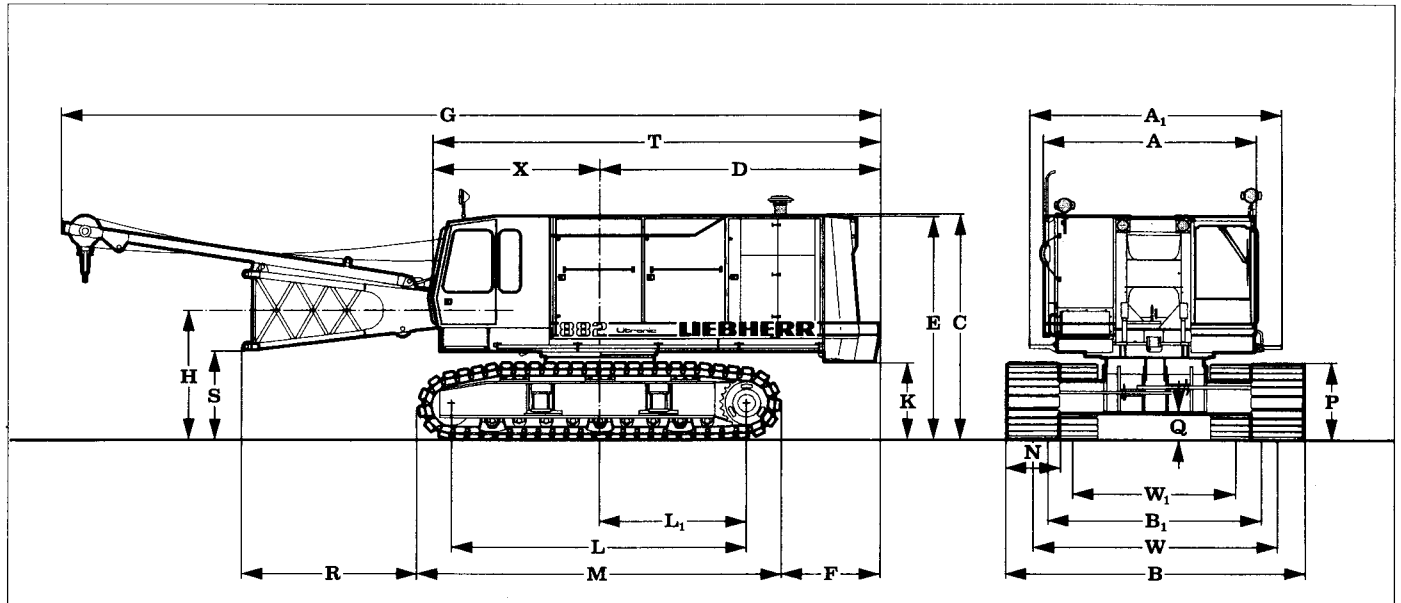

Dimensions

	mm				
A	Width of superstructure	3300/3480	N	Width of track shoes	800 900 1000
A ₁	Width of superstructure with walk way	4040	W ₁	Track width retracted	2990 2990 2990
C	Clearance height of basic machine	3740	W	Track width extended	3920 3920 3920
D	Tail reach	5460	B ₁	Crawler width retracted	4000 4000 4000
	Tail swing radius	5510	B	Crawler width extended	4720 4820 4920
E	Height over counterweight	3650			
F	Distance between rear end of crawler and outside of counterweight	2110			
G	Overall length of superstructure with lowered A-frame	14900			
H	Ground clearance of boom foot pivot	2225			
K	Clearance under superstructure to ground level	1375			
L	Wheel base (center idler to center tumbler)	5450			
L ₁	Distance from center of rotation to center of tumbler	2725			
M	Length of crawlers	6700			
P	Height of crawlers	1440			
Q	Ground clearance of crawler	560			
R	Distance of horizontal boom foot to crawler	2115			
S	Ground clearance of horizontal boom foot	1410			
T	Length of basic machine	8535			
X	Distance from centre of rotation to end of cab	2625			

Operating Weight and Ground Pressure

The operating weight includes the basic machine with B8 crawler tracks, 2 main winches and 11 m HD-boom, consisting of A-frame, boom foot (4 m), boom head section (6.4 m), boom head (0.6 m) and 24.1 mt basic counterweight + 8.4 mt add. counterweight.

with 800 mm flat track shoes:	107.3 mt - 1.23 kg/cm ²
with 900 mm flat track shoes:	108.4 mt - 1.11 kg/cm ²
with 1000 mm flat track shoes:	109.6 mt - 1.01 kg/cm ²
with 800 mm 2-web shoes:	105.1 mt - 1.21 kg/cm ²
with 900 mm 2-web shoes:	105.9 mt - 1.08 kg/cm ²
with 1000 mm 2-web shoes:	106.8 mt - 0.98 kg/cm ²

LIEBHERR

The Better Machine.



Engine

Mercedes-Benz, watercooled V-8 diesel, turbocharged with intercooler. Power rating according DIN 6271: Model OM 442 LA with 297 kW (404 HP) 1900 RPM.

Optional:

Watercooled 12-cylinder-Mercedes-Benz-V-diesel engine, type OM 444 LA. Rating per DIN 6271: 448 kW (609 HP) at 1900 RPM.

Dieseltank: 920 l continuous fuel consumption indication with emergency tank level indication at approx. 40 l.



Hydraulic System

Four main pumps are driven by a distributor gear box. The axial piston displacement pumps work in a closed circuit supplying oil only when needed. A low loss pressure cut-off takes care of the pumps and saves energy. Winch 1 and 2: Axial piston displacement pumps (swash plate design) 565 l/min. each.

Swing gear: Axial piston displacement pump (swash plate design) 203 l/min.

Boom hoist: Axial piston displacement pump (swash plate design) 203 l/min.

Max. working pressure: 340 bar

Hydraulic oil tank: 500 l capacity.

Optional:

Possibility of re-direction boom pump flow to the swing gear for higher speed.

Extended hydraulic system to drive external equipment with hydrostatic power. Oil tank of 1200 l.



Swing Drive

Single row ball bearing with external toothing for lower tooth flank pressure. Fixed axial piston oil motor, planetary gearbox, spring loaded and hydraulically released multi disc brake, swing gear pinon.

A precision swing gear allows variable speed control within 3 selectable speed ranges, swing speed 0 - 3.3 RPM; freewheel moment control of superstructure, therefore almost wearless. Moment force sustained by diesel engine.

Optional:

Second swing gear.



Boom Hoist Drive

Twin drum with internally located planetary gearbox, axial piston oil motor, hydraulically released spring-loaded multi-disc brake.

Max. line pull 2 x 70 kN (2 x 7 mt).

Rope diameter 20 mm, line speed 0 - 27 m/min.

Optional:

Pre selection switch for 2 speed ranges.



Crawler

Propulsion through axial piston motor, hydraulically released spring-loaded multi-disc brake, planetary gear box, maintenance free crawler tracks, hydraulic-type chain tensioning device, flat track- or 2-web shoes. Driving speed 0 - 1.9 km/h.

Optional:

Variable 2 speed oil motor for higher driving speeds.



Winches 1 and 2

Winch options:	20 mt	25 mt	30 mt
Line pull (nominal load):	200 kN	250 kN	300 kN
Rope diameter:	30 mm	34 mm	36 mm
Rope drum diameter:	640 mm	750 mm	800 mm
Line speed 1st layer m/min.	0 - 74	0 - 62	0 - 61
Line speed fast gear m/min.	0 - 124	0 - 115	0 - 115

Planetary gearbox in oil bath. Load support by hydraulic system. Additional security through spring loaded multi disc brake (parking brake). In the freefall mode the clutch and brake function is realized by a separate ample dimensioned multi disc working brake. The hoist and drag winches use variable oil motors controlled by high pressure. This allows the complete utilisation of the installed motorpower with partial loads through speed adaption.

Optional:

Auxiliary winch: 50 kN (5 mt)

Crane winch: 160 kN (16 mt) - with multi-disc brake but without free fall device.



Control System

Electric control impulses are prepared for hydraulic control in the programmable electronic part. The specially treated electronic components are designed for the hard environment for this type of machine. Master control lever (cross movement) for swing and boom movements, double T-lever for winch 1 and 2 or crawlers. Electro-hydraulic continuous proportioning control for work and displacement motions.

Dragline only: Interlock control. Cinematic reversal energy for drag winch is transmitted to the hoist winch, when lifting full bucket to dump, thus saving brakes and energy.


Please ask for details of our patented automatic free fall device.



Equipment

- Tubular HD boom up to 59 m.
- Multi sheave HD boom head or dragline boom head.
- Dragline, clamshell or crane equipment.
- Attachments are possible for piling, drilling, oscillating equipment etc.
- For dragline operation a fairlead is attached to the boom foot to minimize cable wear out.

24.1 mt Counterweight + 5.2 mt Add. Counterweight

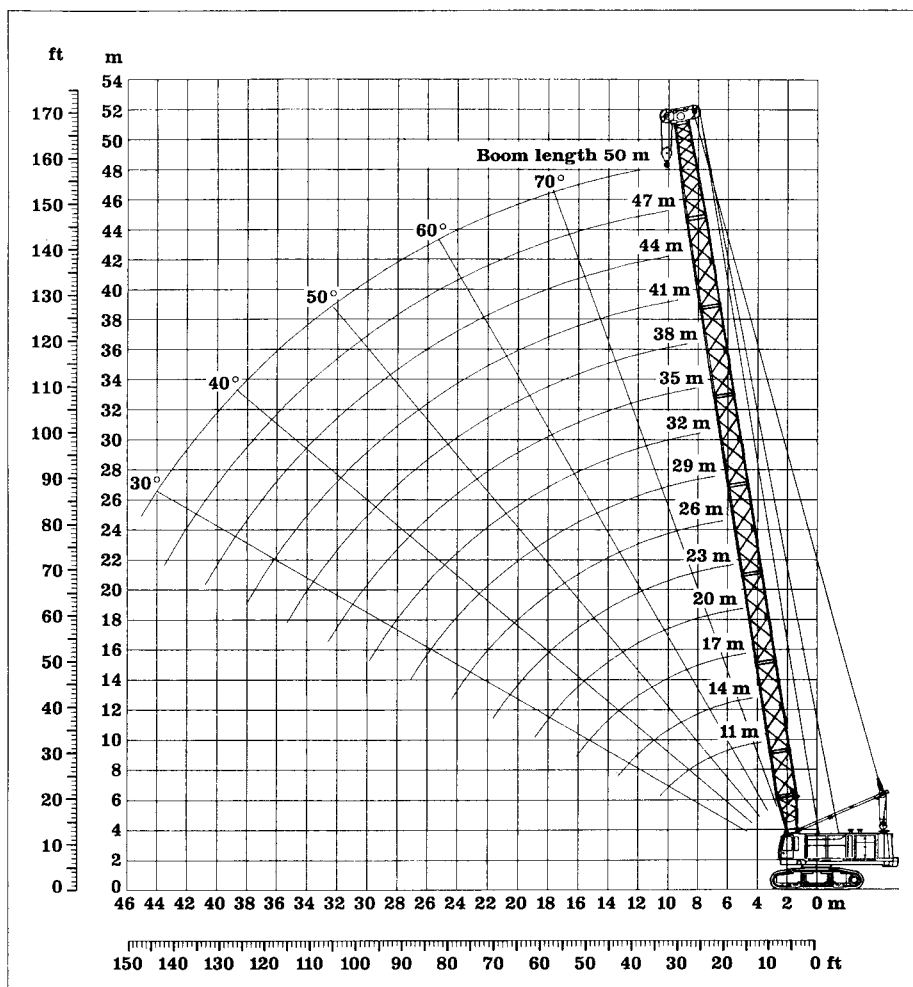

Scope of Delivery:

- Basic machine with corresponding track shoes
- Add. counterweight of 5.2 mt
- A-frame
- Boom foot
- Boom extension 3 m, tubular steel
- Boom extension 6 m, tubular steel
- Boom head extension 6.4 m
- Boom head
- Stay ropes according to boom length
- Main winches according to specification
- Corresponding hook block
- Load moment limiter


Remarks:

1. The lifting capacities with multi sheave boom head are valid for wide track.
2. The lifting capacities stated do not exceed 75 % of the tipping load.
3. The lifting capacities are indicated in metric tons with unlimited swing (360 degrees).
4. The weight of the lifting device must be deducted to arrive at the net load lifting capacity.
5. Working radii are measured from center of swing.
6. Machine standing on firm, level and uniform ground.
7. Max. loads without windload.

Radius m	Boom length m													
	11	14	17	20	23	26	29	32	35	38	41	44	47	50
4	110.0													
4.5	99.0	87.9												
5	89.4	84.8	79.3											
5.5	81.2	81.2	76.7	72.0										
6	70.6	70.6	70.5	69.8	65.7									
6.5	62.4	62.4	62.3	62.2	62.0	58.5								
7	55.8	55.8	55.7	55.6	55.4	55.3	53.8							
7.5	50.5	50.5	50.4	50.2	50.1	49.9	49.7	49.6						
8	46.0	46.0	45.9	45.7	45.6	45.4	45.2	45.1	44.9	43.3				
9	39.0	39.0	38.9	38.7	38.6	38.4	38.2	38.0	37.8	37.6	37.4	36.9		
10	33.7	33.7	33.6	33.5	33.3	33.1	32.9	32.7	32.5	32.3	32.1	31.9	31.7	29.7
11	29.6	29.6	29.5	29.4	29.2	29.0	28.8	28.6	28.4	28.2	28.0	27.8	27.6	27.3
12	26.2	26.3	26.3	26.1	25.9	25.7	25.5	25.3	25.1	24.9	24.7	24.5	24.3	24.0
13		23.6	23.6	23.4	23.3	23.1	22.9	22.7	22.4	22.2	22.0	21.8	21.6	21.3
14		21.4	21.3	21.2	21.0	20.8	20.6	20.4	20.2	20.0	19.8	19.5	19.3	19.1
15		19.4	19.4	19.3	19.1	18.9	18.7	18.5	18.3	18.1	17.9	17.6	17.4	17.2
16			17.8	17.7	17.5	17.3	17.1	16.9	16.7	16.5	16.2	16.0	15.8	15.6
17			16.4	16.3	16.1	15.9	15.7	15.5	15.3	15.1	14.8	14.6	14.4	14.1
18			15.1	15.0	14.9	14.7	14.5	14.3	14.1	13.8	13.6	13.4	13.1	12.9
19				13.9	13.8	13.6	13.4	13.2	13.0	12.8	12.5	12.3	12.1	11.8
20				13.0	12.8	12.6	12.4	12.2	12.0	11.8	11.6	11.3	11.1	10.9
22					11.2	11.0	10.8	10.6	10.4	10.1	9.9	9.7	9.4	9.2
24					9.8	9.6	9.5	9.2	9.0	8.8	8.6	8.3	8.1	7.8
26						8.5	8.3	8.1	7.9	7.7	7.4	7.2	6.9	6.6
28							7.4	7.2	7.0	6.7	6.5	6.2	5.9	5.6
30							6.5	6.3	6.1	5.9	5.6	5.3	5.0	4.7
32								5.6	5.3	5.1	4.8	4.6	4.3	4.0
34									4.7	4.4	4.2	3.9	3.6	3.3
36										3.8	3.6	3.3	3.0	2.7
38											3.0	2.8	2.5	2.2
40												2.5	2.0	1.7
42													1.9	1.6
44														1.3
														0.9

Lifting Capacity with Multi Sheave HD Boom Head

24.1 mt Counterweight + 8.4 mt Add. Counterweight

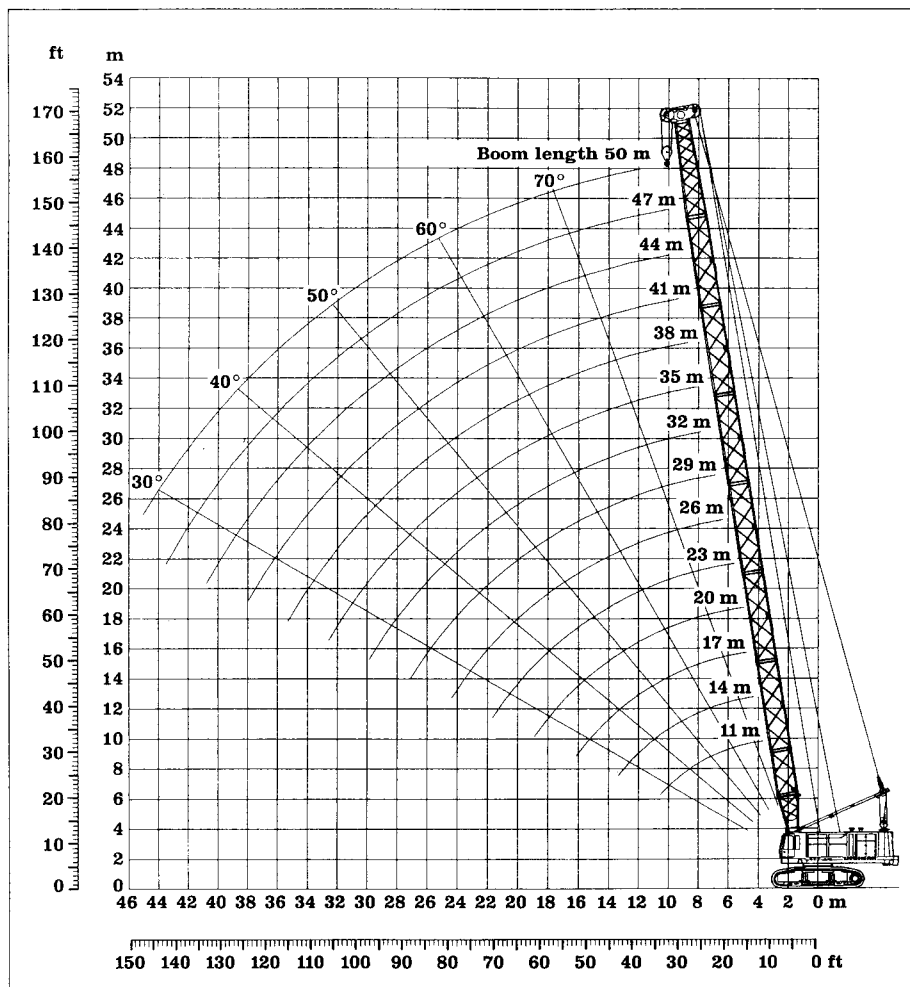

Scope of Delivery:

- Basic machine with corresponding track shoes
- Add. counterweight of 8.4 mt
- A-frame
- Boom foot
- Boom extension 3 m, tubular steel
- Boom extension 6 m, tubular steel
- Boom head extension 6.4 m
- Boom head
- Stay ropes according to boom length
- Main winches according to specification
- Corresponding hook block
- Load moment limiter

Remarks:

1. The lifting capacities with multi sheave boom head are valid for wide track.
2. The lifting capacities stated do not exceed 75 % of the tipping load.
3. The lifting capacities are indicated in metric tons with unlimited swing (360 degrees).
4. The weight of the lifting device must be deducted to arrive at the net load lifting capacity.
5. Working radii are measured from center of swing.
6. Machine standing on firm, level and uniform ground.
7. Max. loads without windload.

Radius m	Boom length m																	
	11	14	17	20	23	26	29	32	35	38	41	44	47	50	53	56	59	
4	120,0																	
4,5	113,8	106,8																
5	100,6	100,6	96,4															
5,5	85,6	85,6	85,6	85,5														
6	74,5	74,5	74,4	74,3	74,1													
6,5	65,8	65,8	65,7	65,7	65,4	65,3												
7	58,9	58,9	58,8	58,7	58,5	58,3	58,2											
7,5	53,2	53,2	53,2	53,0	52,8	52,7	52,5	52,3										
8	48,5	48,5	48,4	48,3	48,1	48,0	47,8	47,6	47,4	47,2								
9	41,2	41,1	41,0	40,9	40,7	40,5	40,4	40,2	40,0	39,8	39,6	36,4						
10	35,6	35,6	35,5	35,4	35,2	35,0	34,8	34,6	34,4	34,2	34,0	33,8	29,5	28,0				
11	31,2	31,3	31,2	31,1	30,9	30,7	30,5	30,3	30,1	29,8	29,6	29,4	27,5	26,5	21,2			
12	27,7	27,8	27,7	27,6	27,4	27,2	27,0	26,8	26,6	26,4	26,1	25,9	25,7	24,0	19,9	17,0	15,9	
13		24,9	24,9	24,7	24,6	24,4	24,2	23,9	23,7	23,5	23,3	23,0	22,8	21,1	18,5	16,0	14,8	
14		22,5	22,5	22,4	22,2	22,0	21,8	21,6	21,4	21,1	20,9	20,7	20,4	19,8	17,0	15,5	13,8	
15		20,5	20,5	20,4	20,2	20,0	19,8	19,6	19,4	19,1	18,9	18,7	18,4	18,2	16,2	14,5	13,1	
16			18,8	18,7	18,5	18,3	18,1	17,9	17,6	17,4	17,2	16,9	16,7	16,5	15,5	13,5	12,1	
17			17,3	17,2	17,0	16,8	16,6	16,4	16,1	15,9	15,7	15,4	15,2	15,0	14,5	12,7	11,4	
18			15,9	15,9	15,7	15,5	15,3	15,1	14,8	14,6	14,4	14,1	13,9	13,7	13,4	12,0	10,7	
19				14,7	14,5	14,4	14,1	13,9	13,7	13,5	13,2	13,0	12,7	12,5	12,3	11,5	10,1	
20				13,6	13,5	13,3	13,1	12,9	12,7	12,4	12,2	12,0	11,7	11,5	11,2	11,0	9,6	
22					11,8	11,6	11,4	11,2	10,9	10,7	10,5	10,2	10,0	9,7	9,5	9,2	8,5	
24					10,3	10,2	10,0	9,7	9,5	9,3	9,0	8,8	8,6	8,3	8,0	7,7	7,4	
26						8,9	8,8	8,6	8,3	8,1	7,9	7,6	7,3	7,0	6,7	6,4	6,1	
28							7,7	7,5	7,3	7,1	6,8	6,5	6,2	5,9	5,6	5,3	5,0	
30							6,8	6,6	6,4	6,2	5,9	5,6	5,3	5,0	4,7	4,4	4,1	
32								5,9	5,6	5,4	5,1	4,8	4,5	4,2	3,9	3,6	3,3	
34									4,9	4,6	4,4	4,1	3,8	3,5	3,2	2,9	2,6	
36										4,0	3,7	3,5	3,2	2,9	2,6	2,3	2,0	
38											3,2	2,9	2,6	2,3	2,0	1,7	1,4	
40												2,7	2,4	2,1	1,8	1,5	1,2	0,9
42													2,0	1,7	1,4	1,1	0,8	0,5
44														1,3	1,0	0,7	0,4	0,1