






100024 SP




100026 SP

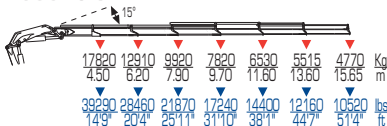


100028 SP

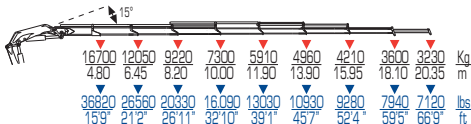


100029 SP

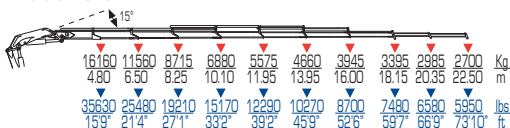


100026 SP + J1614.25

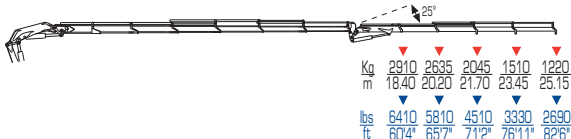

100026 SP + J1616.25

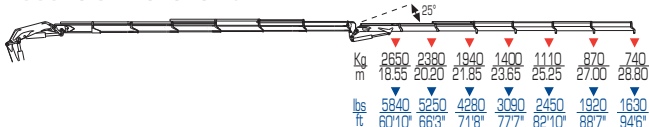


100028 SP + J1614.25

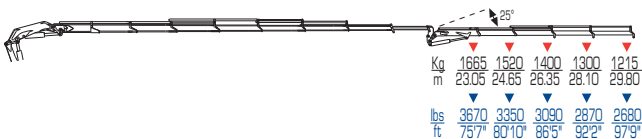

	tm	ft lbs	l/min	gals/min	Mpa	Psi
100024 SP	84	600340	110	29	35	5080
100026 SP	80	578640	110	29	35	5080
100028 SP	79,7	575020	110	29	35	5080
100029 SP	77,5	560560	110	29	35	5080
100026 SP + J1614.25	-	-	110	29	35	5080
100026 SP + J1616.25	-	-	110	29	35	5080
100028 SP + J1614.25	-	-	110	29	35	5080
100028 SP + J1616.25	-	-	110	29	35	5080

100028 SP + J1616.25

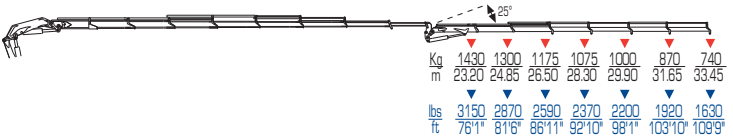

	kg	lbs		ft		ft		ft
	ST	ST	mm	ft	mm	ft	mm	ft
continuo	7615	16790	2550	8'4"	2495	8'2"	1795	5'11"
continuous	8300	18300	2550	8'4"	2495	8'2"	1795	5'11"
continú - endlos	8900	19625	2550	8'4"	2495	8'2"	1795	5'11"
continuo	9180	20240	2550	8'4"	2495	8'10"	1795	5'11"
continuous	9500	20943	2550	8'4"	2695	8'10"	1895	6'3"
continú - endlos	9720	21430	2550	8'4"	2695	8'10"	1895	6'3"
continuo	10120	22310	2550	8'4"	2695	8'10"	1895	6'3"
	10340	22800	2550	8'4"	2695	8'10"	1895	6'3"